

Envent Model M90 (%)

Carbon Monoxide Monitor

The Model M90 is a compact CO₂ monitor with a dual-beam infrared technology. Dual-beam technology provides a second infrared detection channel to automatically correct for any drift in the measurement system, eliminating the need for frequent calibration. The M90 can be included as an additional measurement with other Envent analyzers, or can be offered as a stand-alone analyzer with an integrated sample conditioning system.

Features

- Dual-beam NDIR Technology
- Long-term stability
- Low power consumption (2 watts)
- Dual alarm outputs
- 4 – 20 mA output
- RS-232 and RS-485 Modbus communications
- Two adjustable set point control relays

Applications

- CO₂ is measured routinely in natural gas for product quality and process control purposes. Common ranges are from 0 – 5% for sales gas and up to 0 – 30% for inlet CO₂ concentration.
- Gas Plant Inlet
- Certain H₂S removal chemical processes can be fine-tuned by CO₂ slipstreaming
- Quantify CO₂ as a combustion by-product
- Biogas

Benefits

- Quick delivery
- Class I, Division 1, Groups B, C & D
- Full service & training
- Source life: 10 years minimum




Envent M90 (%) with Sample System




M90 (%) Sensor




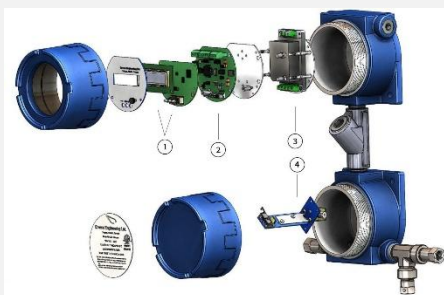

Envent M90 (%) Component

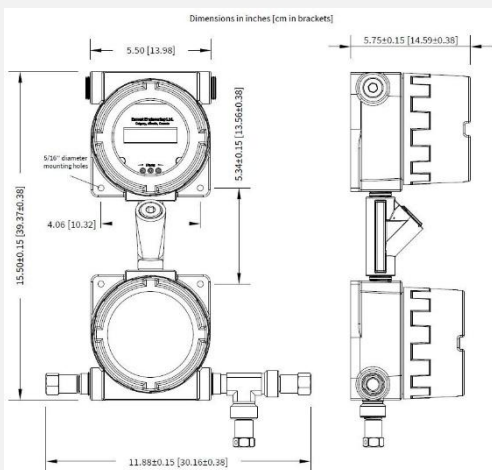

M90 (%) Mounting Dimensions

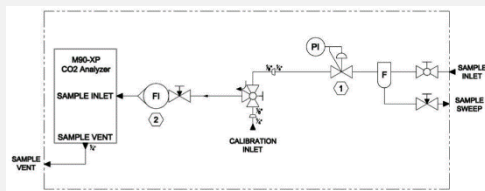

M90 (%) PI&D

Specifications

Enclosure

Class I, Division 1, Groups C & D

Operating Principle

Dual beam, non-dispersive infrared (NDIR)

Detector

Sapphire window with glass frit seal

Sensing Cell Proof Pressure

2 psi (13.8 kPa) gauge pressure

Measurement Range

0 – 20 % CO₂, 0 – 100% CO₂

Repeatability

± 0.1% CO₂

Drift

Less than 2.5% of reading / year

Accuracy

± 3% of reading or 0.1% CO₂ at cal temperature
± 5% of reading or 0.1% CO₂ over full operating temperature range

Warm Up Time

Less than 5 minutes

Operating Temperature

10°C - 50°C (50°F - 122°F)

Operating Humidity

Sensing Cell: 0 – 100% RH (non-condensing)
Electronics: 0 – 90% RH (non-condensing)

Storage Temperature

-20°C to 60°C (-4°F to 140°F)

Storage Humidity

0 – 90% RH (non-condensing)

Analog Output

Isolated 4 – 20 mA

Digital Interface

RS-485 & RS-232

Operating Power

7.5 – 15 VDC @ 170 mA max (125 mA AVG.)
Approx. 1.0W with 12 V input

Source Life

10 years minimum

Alarm Outputs

2 solid state drivers 2 Amp, 30 VDC maximum

Canadian Office

2721 Hopewell Place NE
Calgary, Alberta, Canada T1Y 7J7
Phone: 403-253-4012
Email: canadasales@envent.com

USA Office

12560 Reed Road
Sugar Land, Texas, USA 77478
Phone: 713-568-4421
Email: usasales@envent.com

Mexico Office

Av. Revolución No. 1267,
Floor 19, Office 55
Mexico City, MX
Phone: +52 833 247 8260
Email: mexicosales@envent.com

International

Phone: 403-253-4012
Email: internationalsales@envent.com